


NIT-IND-1450_in tl

HER

44,2W CRI80 4000K 120° Terra PUSH ONLY

Product reference: A5A6.840038C0.PX.XX4

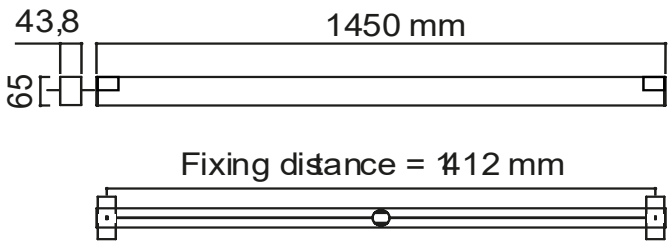

Total Power	Luminous flux	Total Efficiency	CRI	CCT
Potencia total	Flujo luminoso	Eficiencia total	IRC	CCT
44,2 W	4395 Lm	100 Lm/W	80	4000 K
MacAdam	Beam angle	Voltage	Dimming	UGR
MacAdam	Ángulo de apertura	Voltaje	Regulación	UGR
3	120º	220-240 Vac	PUSH ONLY	<25
Material	Finish	IP	Lifespan	Warranty
Material	Acabado	IP	Vida útil	Garantía
Aluminium	Terracota Textured Matt NCS S 3050-Y60R	20	L70 > 50000h	5 years *

LED/Optic Óptica

- PCB TRIDONIC
- Opal diffuser


Driver Convertidor

- Included - Incluido

Downloads Descargas




* See company terms and conditions - Ver condiciones de empresa

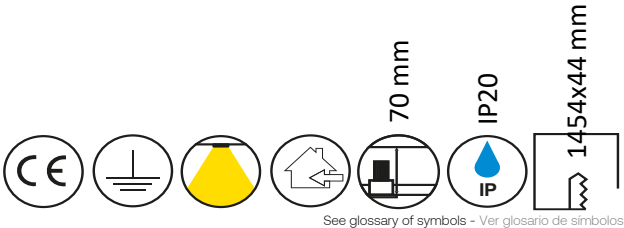

See glossary of symbols - Ver glosario de símbolos

NIT-IND-1450_in tl




44,2W CRI80 4000K 120° Terra PUSH ONLY


Product reference: A5A6.840038C0.PX.XX4

Photometric Fotometría

Light emission Emisión de luz
Conic diagram

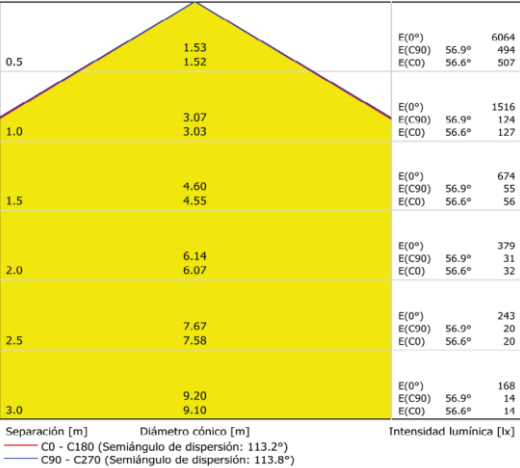

Light emission Emisión de luz
CDL polar

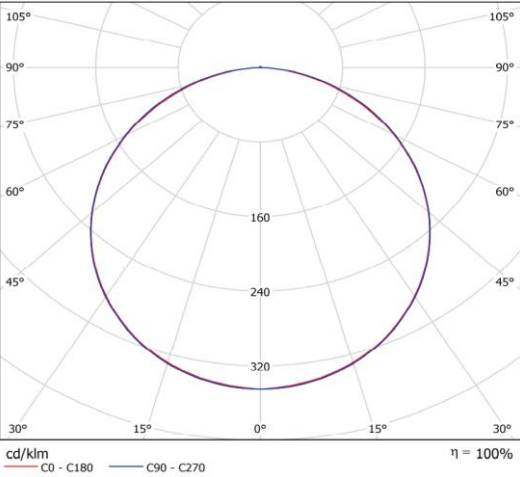

Accessories Accesorios

-

* See company terms and conditions - Ver condiciones de empresa