



PM 55_in dl-



13,6W CRI90 2700K 25° Mocha PH-CUT

Product reference: 2211.92701225.OX.XX2



Total Power	Luminous flux	Total Efficiency	CRI	CCT
Potencia total	Flujo luminoso	Eficiencia total	IRC	CCT
13,6 W	1080 Lm	80 Lm/W	90	2700 K
MacAdam	Beam angle	Voltage	Dimming	UGR
MacAdam	Ángulo de apertura	Voltaje	Regulación	UGR
3	25º	220-240 Vac	PH-CUT	N/A
Material	Finish	IP	Lifespan	Warranty
Material	Acabado	IP	Vida útil	Garantía
Aluminium	Mocha Textured Matt NCS S 5010-Y10R	20	L70 > 50000h	5 years *


LED/Optic Óptica

- COB LUMINUS
- Reflector

Driver Convertidor

- Included - Incluido


Downloads Descargas

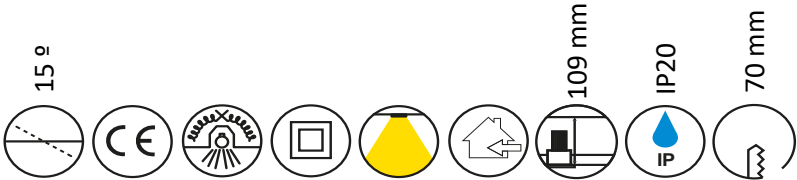

See glossary of symbols - Ver glosario de símbolos

* See company terms and conditions - Ver condiciones de empresa

PM 55_in dl-




13,6W CRI90 2700K 25° Mocha PH-CUT


Product reference: 2211.92701225.OX.XX2

Photometric Fotometría

Light emission Emisión de luz
Conic diagram

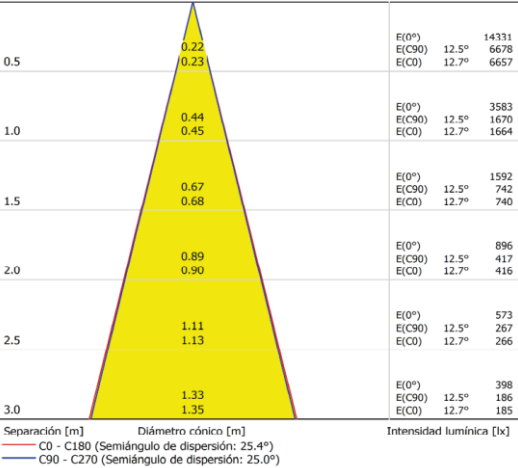

Light emission Emisión de luz
CDL polar

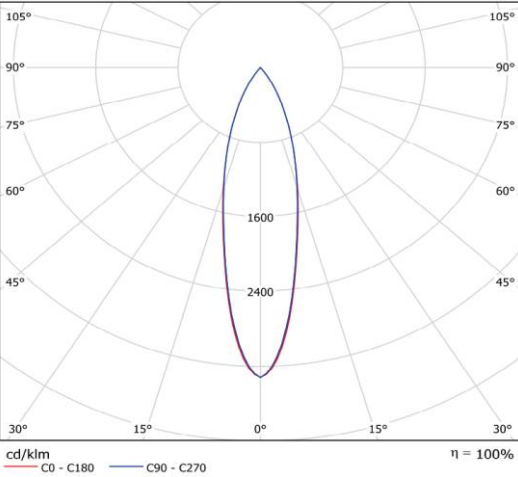

Accessories Accesorios

-

* See company terms and conditions - Ver condiciones de empresa