Tare XS Mag

3,4W CRI90 3000K 36º Black NO-DRV

Product reference: P260.93000336.BL.XX0

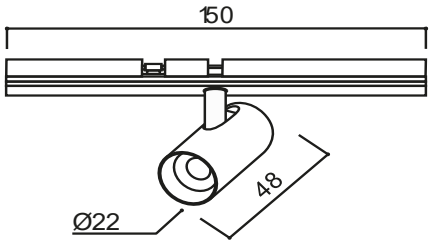

Total Power Potencia total	Luminous flux Flujo luminoso	Total Efficience Eficiencia total	CRI IRC	CCT CCT
3,4 W	300 Lm	89 Lm/W	90	3000 K

MacAdam MacAdam	Beam angle Ángulo de apertura	Voltage Voltaje	Dimming Regulación	UGR UGR
3	36º	48 Vac	NO-DRV	N/A

Material Material	Finish Acabado	IP IP	Lifespan Vida útil	Warranty Garantía
Aluminium	Black Smooth Matt RAL9005	20	L70 > 50000h	3 years *

LED/Optic Óptica
- COB LED
- Lens

Driver Convertidor
- Included - Incluido

Downloads Descargas

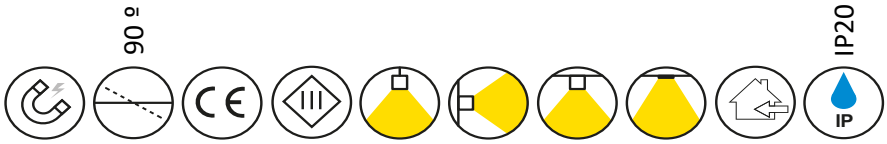

See glossary of symbols - Ver glosario de símbolos

* See company terms and conditions - Ver condiciones de empresa

At HER Lighting we are committed to constant innovation and improvement. This means that product specifications, data, and technical details may be updated at any time to enhance reliability, functionality, or performance. We make every effort to ensure the accuracy of our product images; however, variations in lighting conditions and screen settings may cause colours to appear differently. Images are indicative of the style and quality of our luminaires but may not exactly represent the final product you receive, as we are continuously refining our designs.

Tare XS Mag

3,4W CRI90 3000K 36º Black NO-DRV

Product reference: P260.93000336.BL.XX0

Photometric Fotometría

Light emission Emisión de luz
Conic diagram

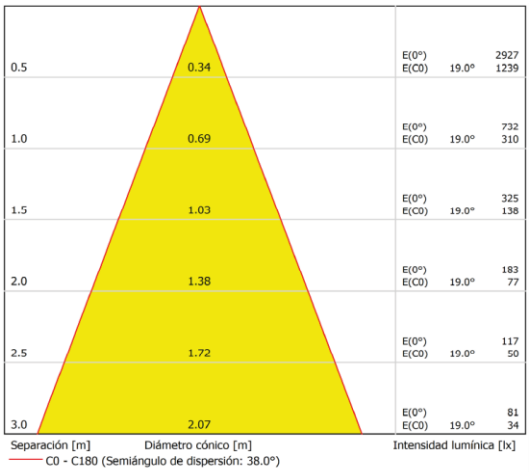

Light emission Emisión de luz
CDL polar

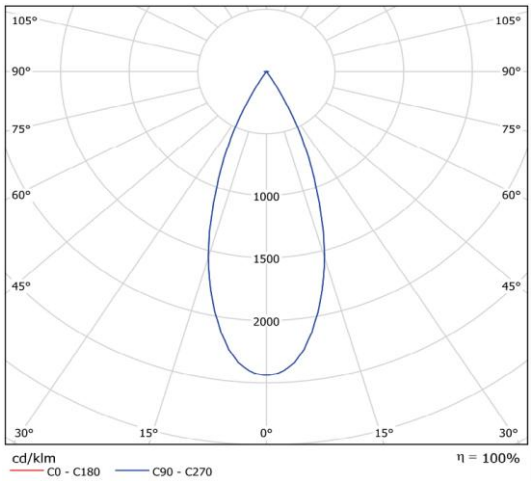

Accessories Accesorios

• Round drv. 150W 48V ON-OFF	Drv. redondo 150W 48V ON-OFF	PC258
• Linear drv. 100W 48V ON-OFF	Drv. lineal 100W 48V ON-OFF	PC259
• Driver 60W 48Vdc ON-OFF	Driver 60W 48Vdc ON-OFF	AC9017
• Driver 100W 48Vdc ON-OFF	Driver 100W 48Vdc ON-OFF	AC9018
• Driver 150W 48Vdc ON-OFF	Driver 150W 48Vdc ON-OFF	AC9019
• Dimmer 12-48Vdc DALI/PUSH	Dimmer 12-48Vdc DALI/PUSH	AC0222
• Dimmer 12-48Vdc PH-CUT	Dimmer 12-48Vdc PH-CUT	AC0223
• Power repeater 12-48Vdc	Repetidor 12-48Vdc	AC0227

* See company terms and conditions - Ver condiciones de empresa

At HER Lighting we are committed to constant innovation and improvement. This means that product specifications, data, and technical details may be updated at any time to enhance reliability, functionality, or performance. We make every effort to ensure the accuracy of our product images; however, variations in lighting conditions and screen settings may cause colours to appear differently. Images are indicative of the style and quality of our luminaires but may not exactly represent the final product you receive, as we are continuously refining our designs.